



GEZE PATCH FITTINGS CLAMPING BEARINGS FOR ALL-GLASS INSTALLATIONS



CONTENTS


Elegant solutions - versatile and easy to install	4
Overview door system types	5
Bottom patch GEZE PT 10	7
Floor pivot DL-FL and DL-RD	8
Top patch GEZE PT 20	9
Top pivot GEZE PT 24 and GEZE PT 21	10
Fanlight patch with pivot pin GEZE PT 30	11
Patch for fanlight and side panel GEZE PT 40	12
Patch for fanlight and side panel with reinforcement GEZE PT 41L / PT 41R	13
Centre lock GEZE US 50-FL and GEZE US 50-RD	14
Patch lock GEZE PL 50-FL and GEZE PL 50-RD	15
Bottom lock GEZE PL 55	16
Bottom lock, rounded GEZE PL 60	17
Double fanlight patch with reinforcement GEZE PT 51	18
Double strike box GEZE GK 20	19
Strike box GEZE GK 50	20
Connector patch with stop plate GEZE PT 62	21
Connector patch GEZE PT 63	22
Connector patch GEZE PT 70	23
Double fanlight patch GEZE PT 75	24
Connector patch GEZE PT 80	25
Connector patch with reinforcement GEZE PT 81	26
Connector patch for wall mounting GEZE PT 84	27
Connector patch for wall mounting GEZE PT 90	28
Fixed panel profile GEZE FP	29
GEZE products in combination with patch fittings	30
Floor spring GEZE TS 500 NV and TS 500 N EN3	31
Floor spring GEZE TS 550 NV	32

They distinguish themselves by their timelessly elegant and unobtrusive design. All visible parts are made of anodised aluminium or of satin respectively polished stainless steel with the finest structures on flat surfaces.

For exterior installations	•
For interior installations	•
For double-action doors	•
For fixed partition walls and wall covering	•
Door leaf weight	max. 100 kg
Door leaf width	max. 1000 mm
Door leaf height	max. 2800 mm
Glass thickness	ESG (8) / 10 / 12 mm
Torque	screws M6 max. 15 Nm screws M8 max. 20 Nm


Figure 10 shows four diagrams illustrating different types of floor pivot connections. Each diagram shows a vertical wall on the left and a horizontal floor on the bottom. The wall has a pivot point (PT20) and the floor has a pivot point (PT10). The diagrams show different types of connections:

- Diagram 1 (PT21):** Shows a single vertical line connecting PT20 to PT10. The connection is labeled "TS 500/550 NV or floor pivot DL-FL".
- Diagram 2 (PT24):** Shows a vertical line connecting PT20 to PT10, with a horizontal line (US50) and a vertical line (GK50) intersecting at PT20. The connection is labeled "TS 500/550 NV or floor pivot DL-FL".
- Diagram 3 (PT24):** Shows a vertical line connecting PT20 to PT10, with a horizontal line (US50) and a vertical line (GK50) intersecting at PT20. The connection is labeled "TS 500/550 NV or floor pivot DL-FL".
- Diagram 4 (PT24):** Shows a vertical line connecting PT20 to PT10, with a horizontal line (US50) and a vertical line (GK50) intersecting at PT20. The connection is labeled "TS 500/550 NV or floor pivot DL-FL".

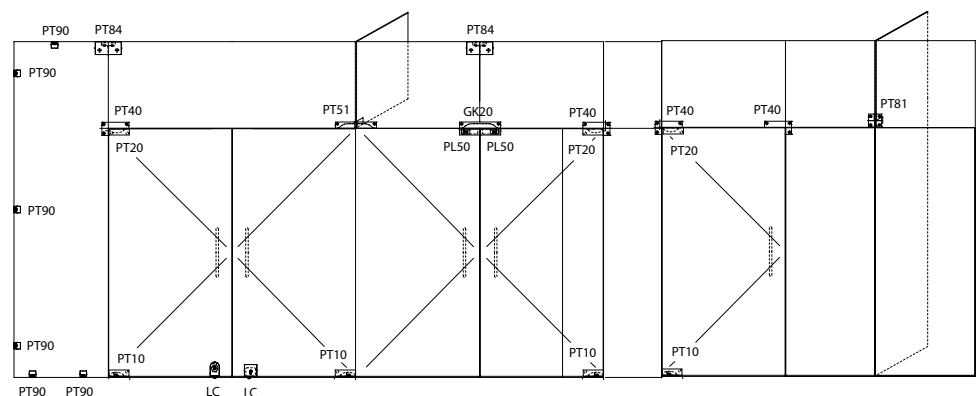


OVERVIEW DOOR SYSTEMS (WITHOUT FANLIGHT)


Type 1




Type 2

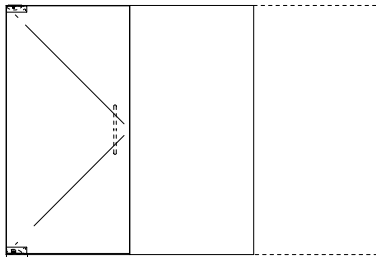


Type 4

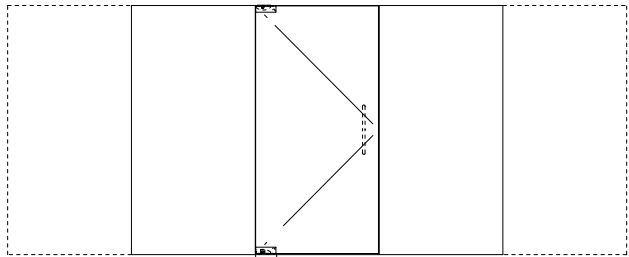


Type 3

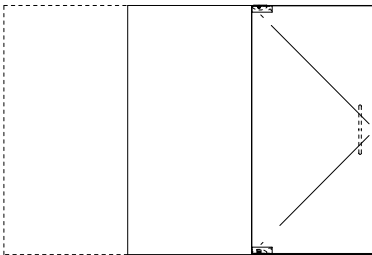


Type 14




Type 17

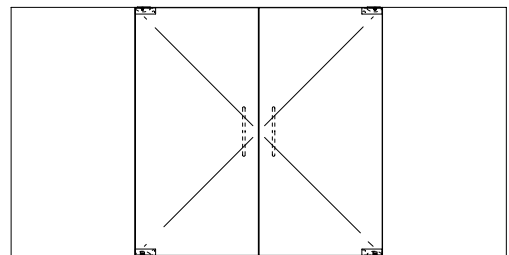

Type 15

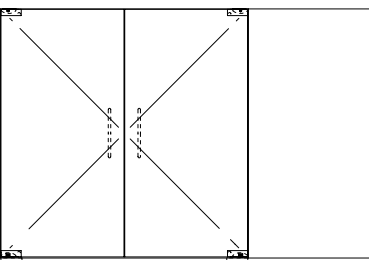


Type 16

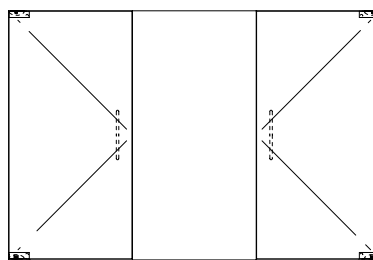


OVERVIEW DOOR SYSTEMS (WITH FANLIGHT)


Type 5




Type 6




Type 7



Type 8




Type 9




OVERVIEW DOOR SYSTEMS (WITH FANLIGHT)


Type 10

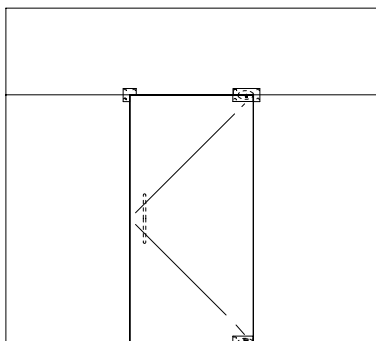


Type 11

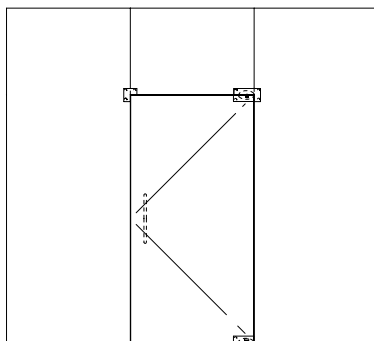


Type 12

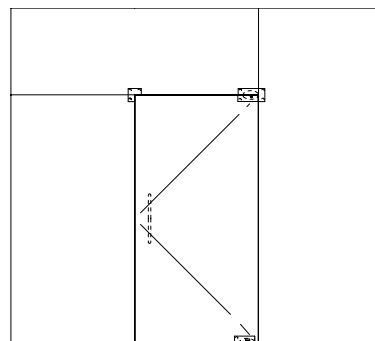


Type 19

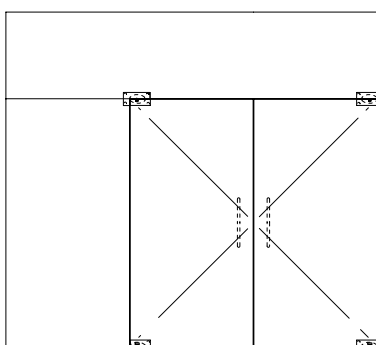


Type 20

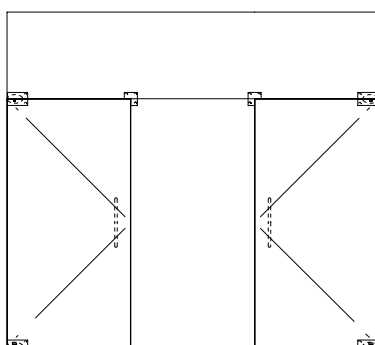


Type 20a

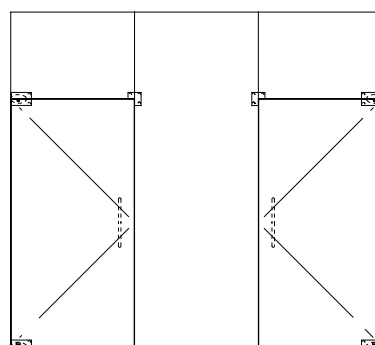


Type 18




Type 21

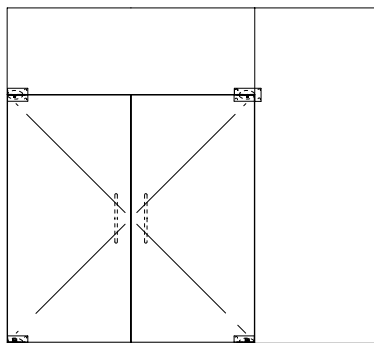


Type 22

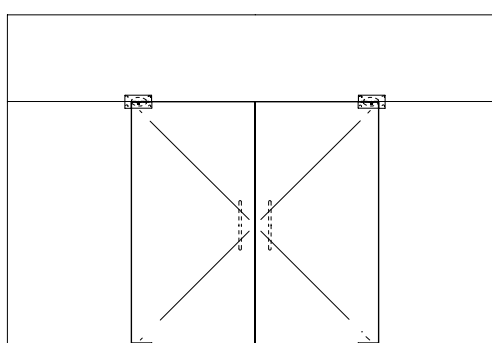

Type 23

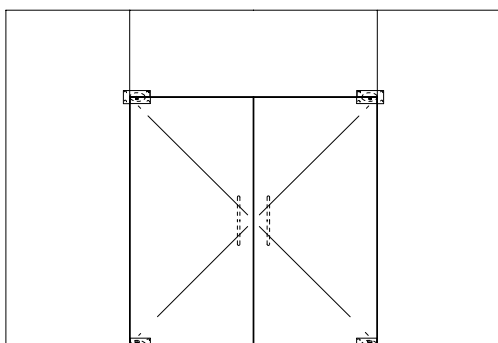

Type 24

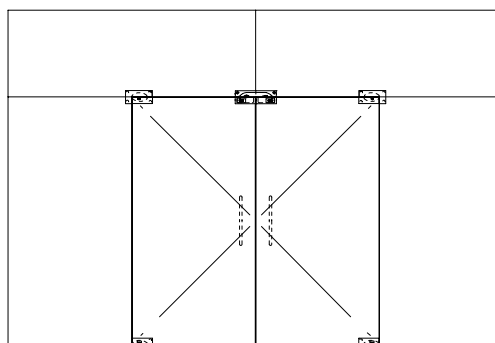


Bottom patch GEZE PT 10

- connection to floor spring
- surface made of anodised aluminium, stainless steel satin or polished

GEZE PT 10



Drawing no. 91905-1-0100

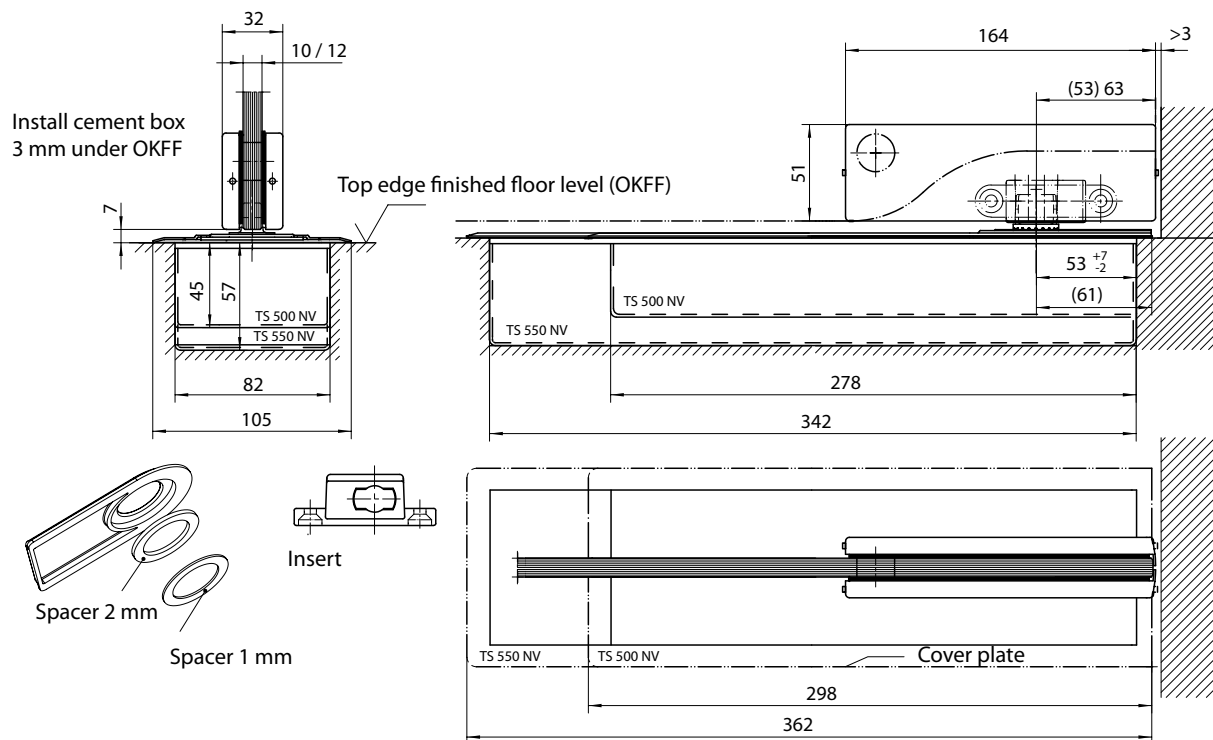

Glass machining, see drawing no. 91905-9-0950

ORDERING INFORMATION


Description	Version	ID no.
Bottom patch GEZE PT 10	stainless steel satin	111458
	stainless steel polished	119869
	anodised aluminium	135070
Floor pivot DL-FL	galvanised steel	135393
Floor pivot DL-RD	galvanised steel	135555
Spacer set for use with TS 500/550 NV	plastic	135557
Additional shim IL 10/20/30 for 8 mm glass		135077

GEZE PATCH FITTINGS

Floor pivot DL-FL

- to use with GEZE PT 10
- door leaf weight max. 100 kg


Drawing no. 91905-1-0150

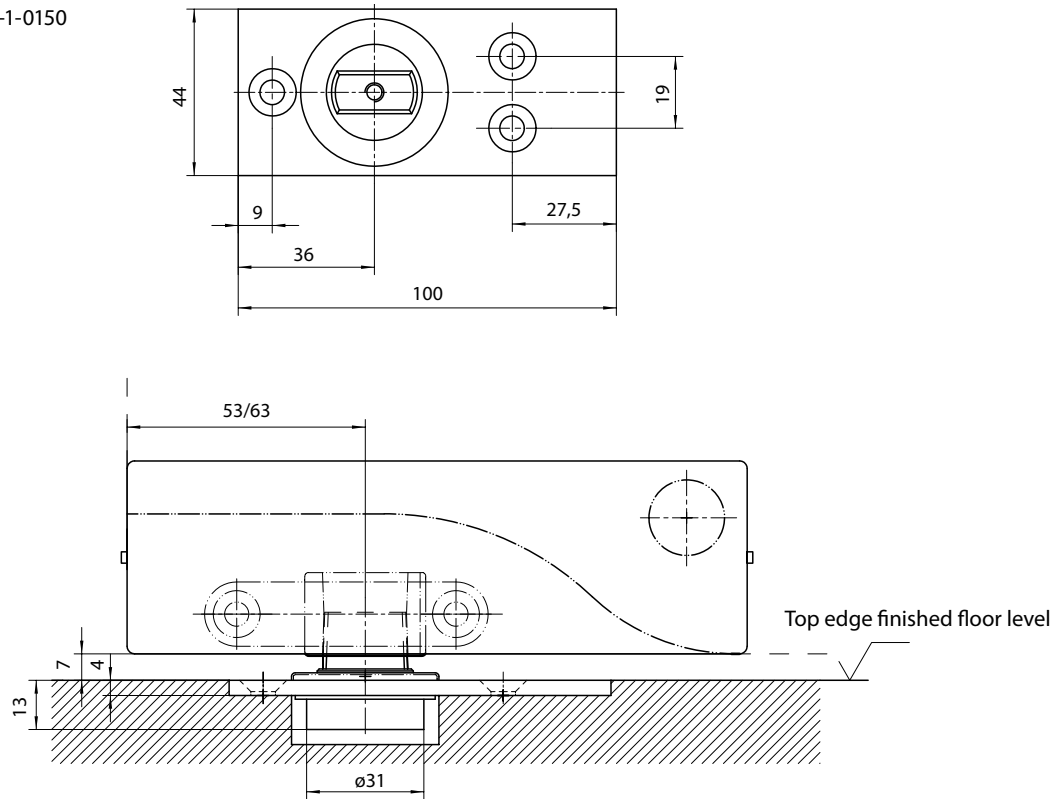

Floor pivot DL-RD

- to use with GEZE PT 10
- door leaf weight max. 80 kg

Drawing no. 91905-1-0151

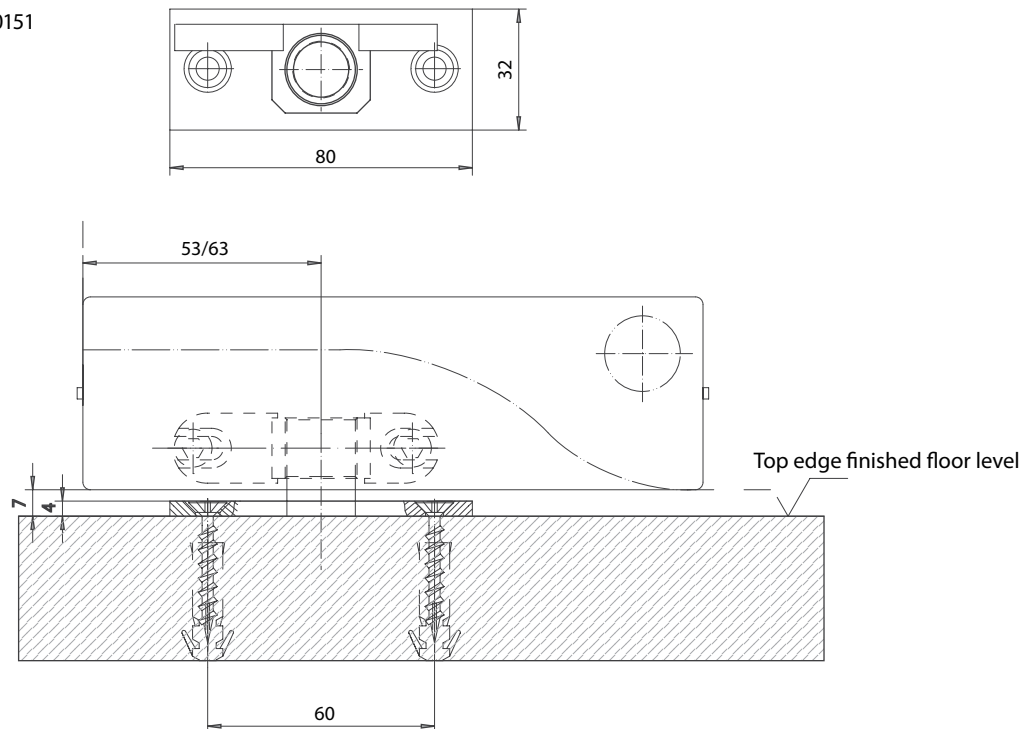


Top patch GEZE PT 20

- connection to PT 24 (upper pivot point) or TP 30 and PT 40
- surface made of anodised aluminium, stainless steel satin or polished

GEZE PT 20



Drawing no. 91905-1-0101

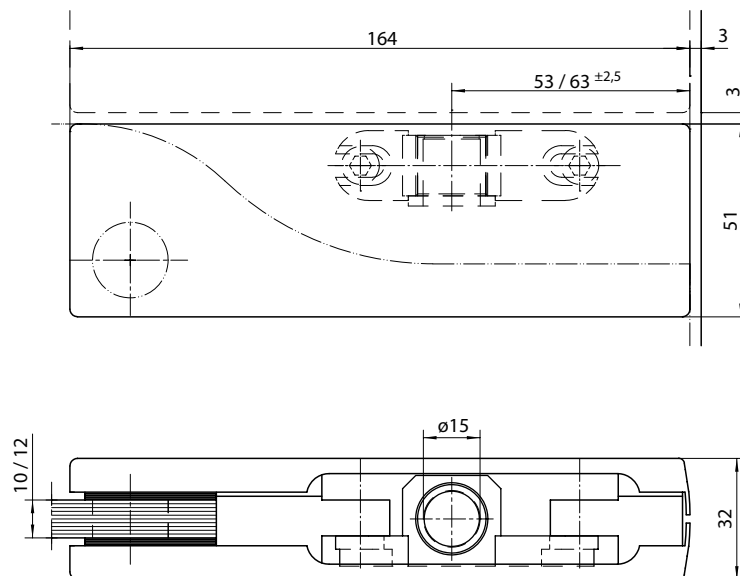

Glass machining, see drawing no. 91905-9-0950

ORDERING INFORMATION

Description	Version	ID no.
Top patch GEZE PT 20	stainless steel satin	111459
	stainless steel polished	119870
	anodised aluminium	135081
Additional shim IL 10/20/30 for 8 mm glass		135077

GEZE PATCH FITTINGS

Top pivot GEZE PT 24 and GEZE PT 21


- top pivot with fixing plate for doors without fanlight GEZE PT 24
- top pivot (pivot top TS 136/O Stop 360 V) for doors without fanlight GEZE PT 21

GEZE PT 24




GEZE PT 24

Drawing no. 91905-1-0103

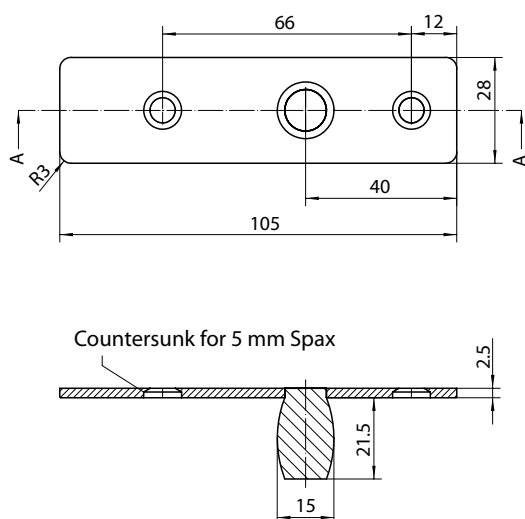

GEZE PT 21

Drawing no. 91905-1-0102

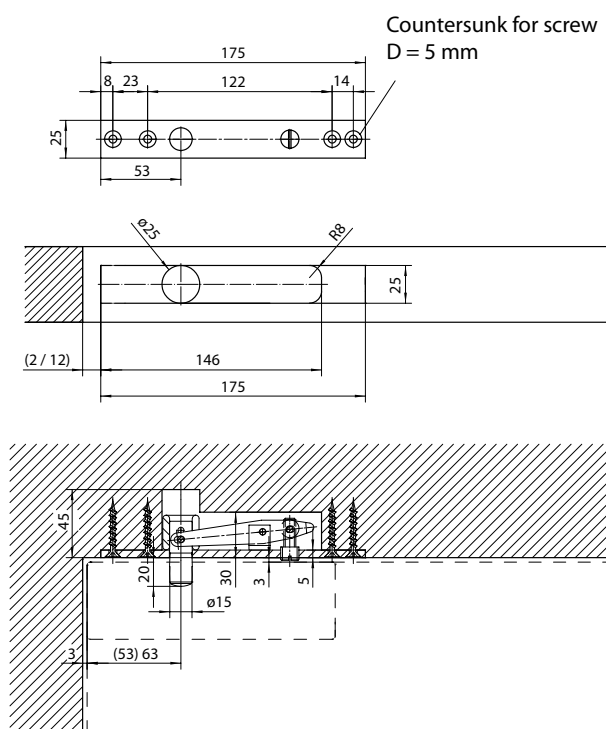

ORDERING INFORMATION

Description	Version	ID no.
Top pivot GEZE PT 24	stainless steel	111460
Top pivot GEZE PT 21	galvanised steel	010739


Fanlight patch with pivot pin GEZE PT 30

- fanlight patch for wall fixing
- surface made of anodised aluminium, stainless steel satin or polished

GEZE PT 30



Drawing no. 91905-1-0104

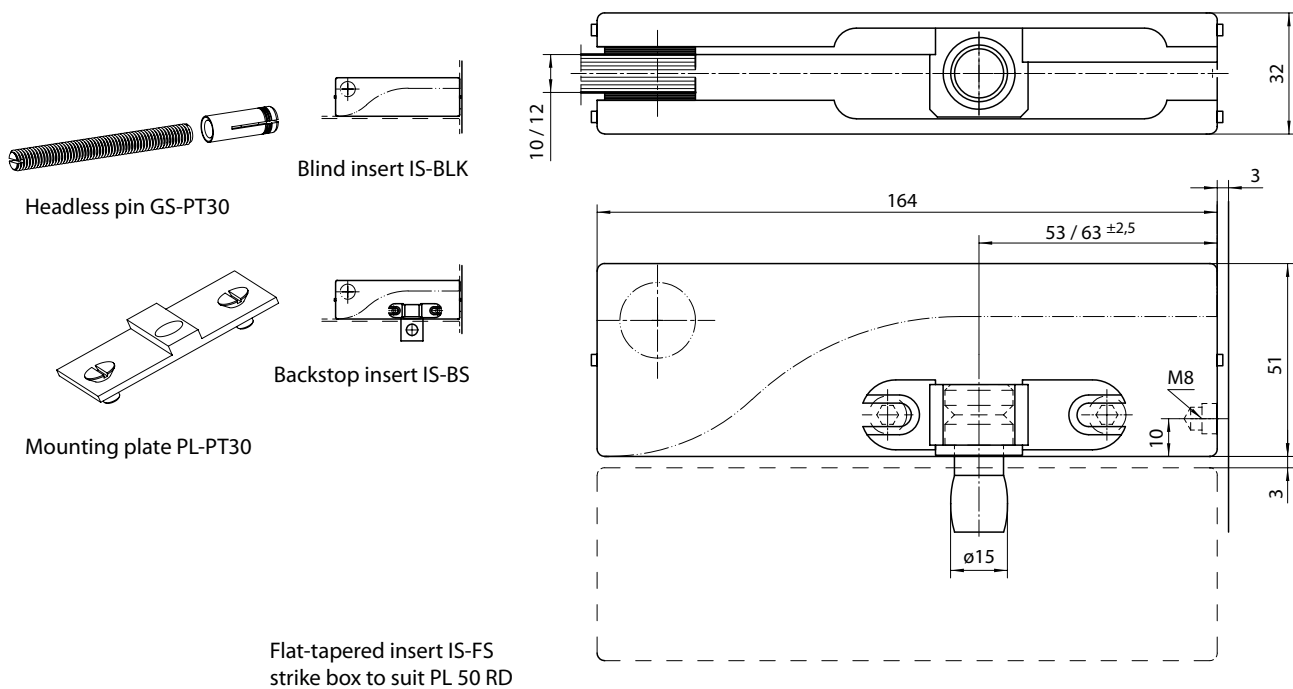

Glass machining, see drawing no. 91905-9-0950

ORDERING INFORMATION

Description	Version	ID no.
Fanlight patch with pivot GEZE PT 30	stainless steel satin	111461
	stainless steel polished	119881
	anodised aluminium	135082
Blind insert IS-BLK	stainless steel satin	135349
	stainless steel polished	135106
	anodised aluminium	135350
Backstop insert IS-BS	steel	135105
Headless pin GS-PT30	steel	135103
Mounting plate PL-PT30	stainless steel	135104
Additional shim IL 10/20/30 for 8 mm glass		135077

GEZE PATCH FITTINGS


Patch for fanlight and side panel GEZE PT 40

- top pivot with connection to the fanlight and lateral fixed panel
- surface made of anodised aluminium, stainless steel satin or polished

GEZE PT 40



Drawing no. 91905-1-0106

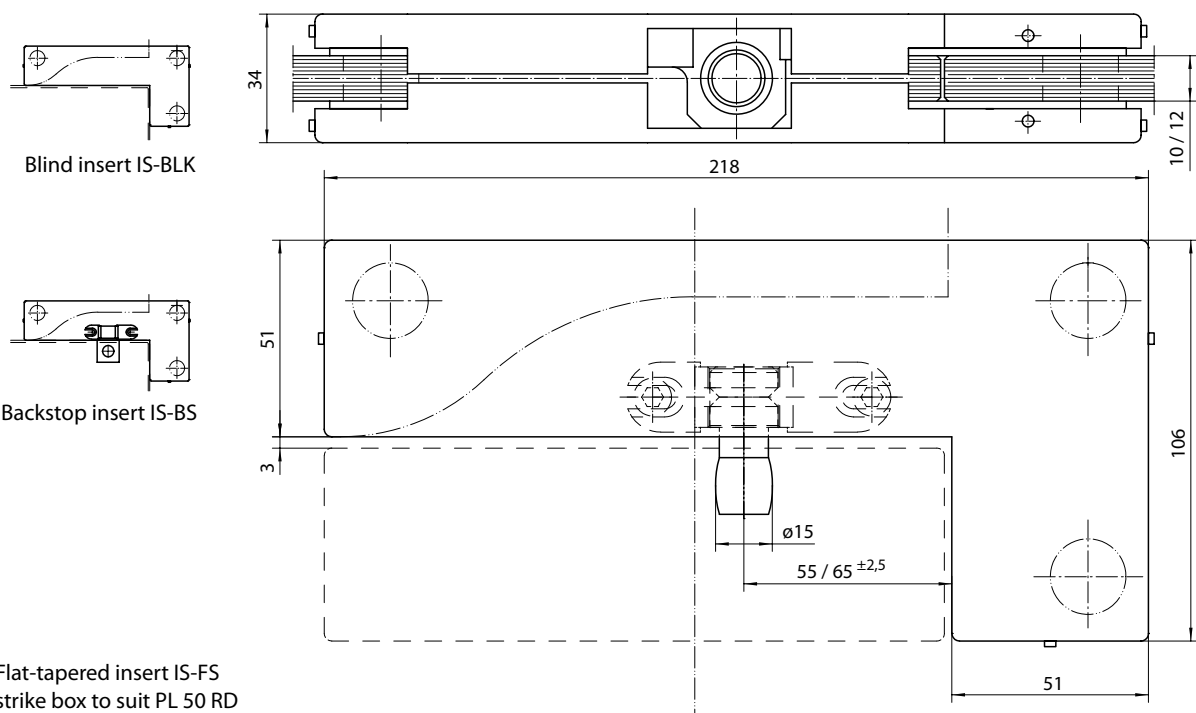

Glass machining, see drawing no. 91905-9-0951

ORDERING INFORMATION

Description	Version	ID no.
Patch for fanlight and side panel GEZE PT 40	stainless steel satin	111462
	stainless steel polished	119882
	anodised aluminium	135083
Blind insert IS-BLK	stainless steel satin	135349
	stainless steel polished	135106
	anodised aluminium	135350
Backstop insert IS-BS	steel	135105
Additional shim IL 40 for 8 mm glass		135078


Patch for fanlight and side panel with reinforcement GEZE PT 41L / PT 41R

- patch for fanlight and side panel / reinforcement left or right
- surface made of anodised aluminium, stainless steel satin or polished


GEZE PT 41L / PT 41R




Drawing no. 91905-1-0107




GEZE PT 41L with
reinforcement left



Blind insert IS-BLK




Backstop insert IS-BS



GEZE PT 41R with
reinforcement right

Flat-tapered insert IS-FS
strike box to suit PL 50 RD

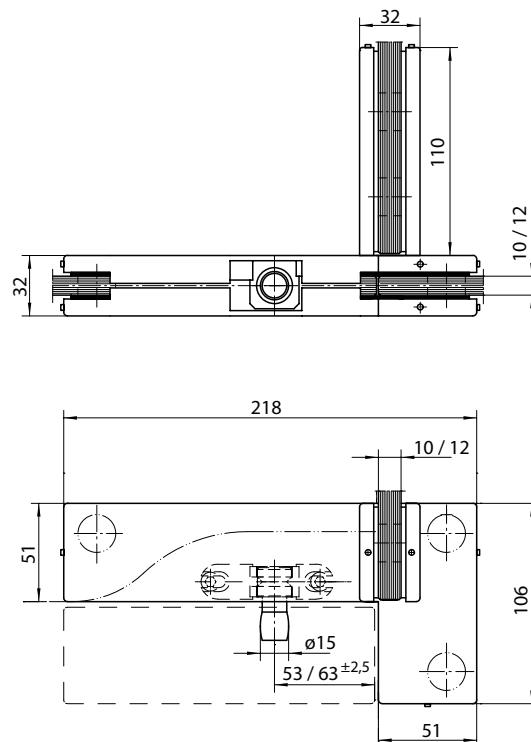

Glass machining, see drawing no. 91905-9-0952

ORDERING INFORMATION

Description	Version	ID no.
Patch for fanlight and side panel with reinforcement left GEZE PT 41L	stainless steel satin	124158
	stainless steel polished	124159
	anodised aluminium	135085
Patch for fanlight and side panel with reinforcement right GEZE PT 41R	stainless steel satin	124160
	stainless steel polished	124161
	anodised aluminium	135084
Blind insert IS-BLK	stainless steel satin	135349
	stainless steel polished	135106
	anodised aluminium	135350
Backstop insert IS-BS	steel	135105
Additional shim IL 41 for 8 mm glass		135079

GEZE PATCH FITTINGS


Centre lock GEZE US 50-FL and GEZE US 50-RD

- centre lock without cylinder, with flat bolt (version US 50-FL) or with round bolt (version US 50-RD)
- surface made of anodised aluminium, stainless steel satin or polished

GEZE US 50



Drawing no. 91905-1-0122

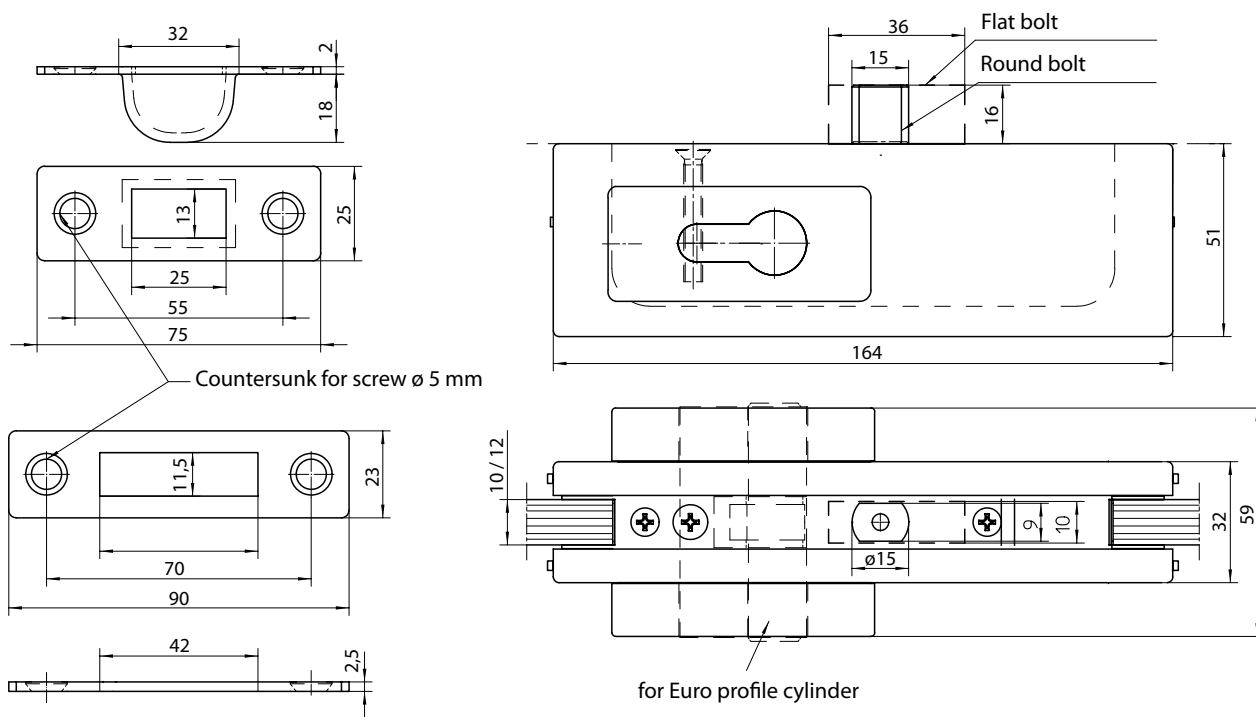

Glass machining, see drawing no. 91905-9-0962

ORDERING INFORMATION

Description	Version	ID no.
Centre lock with flat bolt GEZE US 50-FL	stainless steel satin	111464
	stainless steel polished	119884
	anodised aluminium	135101
Centre lock with round bolt GEZE US 50-RD	stainless steel satin	124152
	stainless steel polished	124153
	anodised aluminium	135102
Latch catch LC	stainless steel satin	124156
	stainless steel polished	124157
Flat latch catch SB	stainless steel satin	124942
	stainless steel polished	124943
Additional shim IL 50 for 8 mm glass		135149


Patch lock GEZE PL 50-FL and GEZE PL 50-RD

- patch lock without cylinder, with flat bolt (version PL 50-FL) or with round bolt (version PL 50-RD)
- surface made of anodised aluminium, stainless steel satin or polished

GEZE PL 50



Drawing no. 91905-1-0117

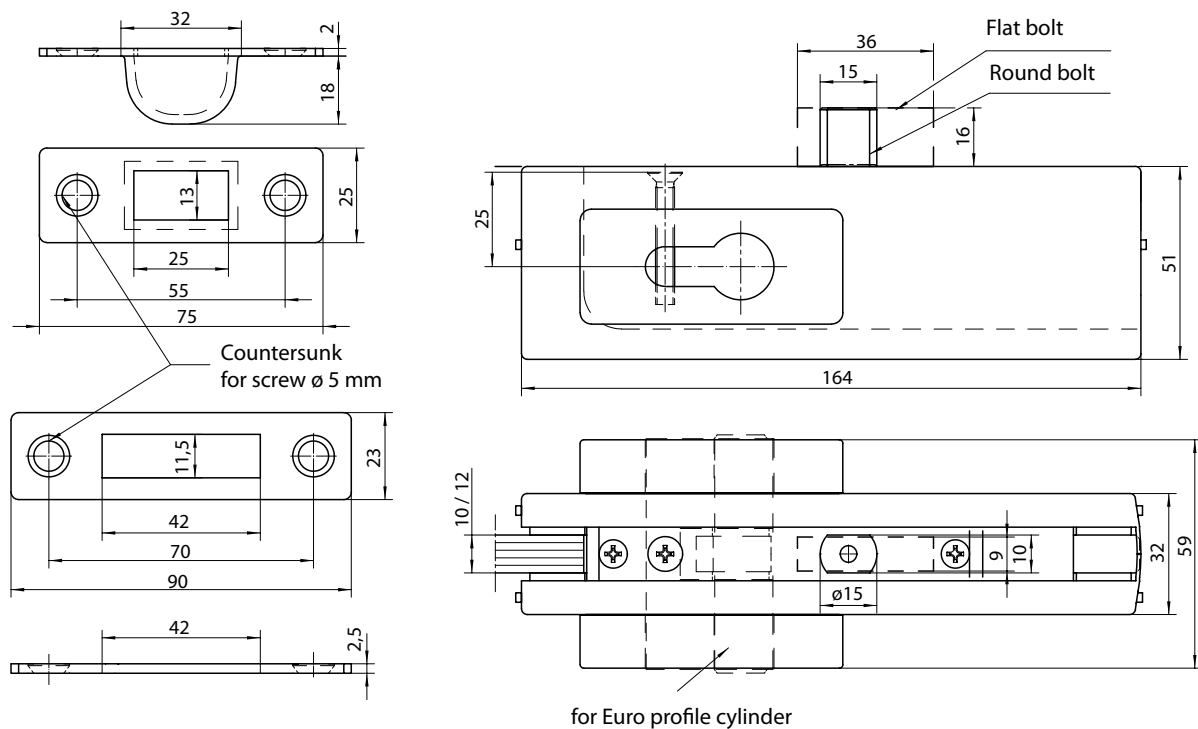

Glass machining, see drawing no. 91905-9-0963

ORDERING INFORMATION

Description	Version	ID no.
Patch lock with flat bolt GEZE PL 50-FL	stainless steel satin	111465
	stainless steel polished	119885
	anodised aluminium	135095
Patch lock with round bolt GEZE PL 50-RD	stainless steel satin	124154
	stainless steel polished	124155
	anodised aluminium	135096
Latch catch LC	stainless steel satin	124156
	stainless steel polished	124157
Flat latch catch SB	stainless steel satin	124942
	stainless steel polished	124943
Additional shim IG PL 50 for 8 mm glass		135149

GEZE PATCH FITTINGS


Bottom lock GEZE PL 55

- bottom lock with round bolt
- Surface made of anodised aluminium, stainless steel satin or polished

GEZE PL 55



Drawing no. 91905-1-0118

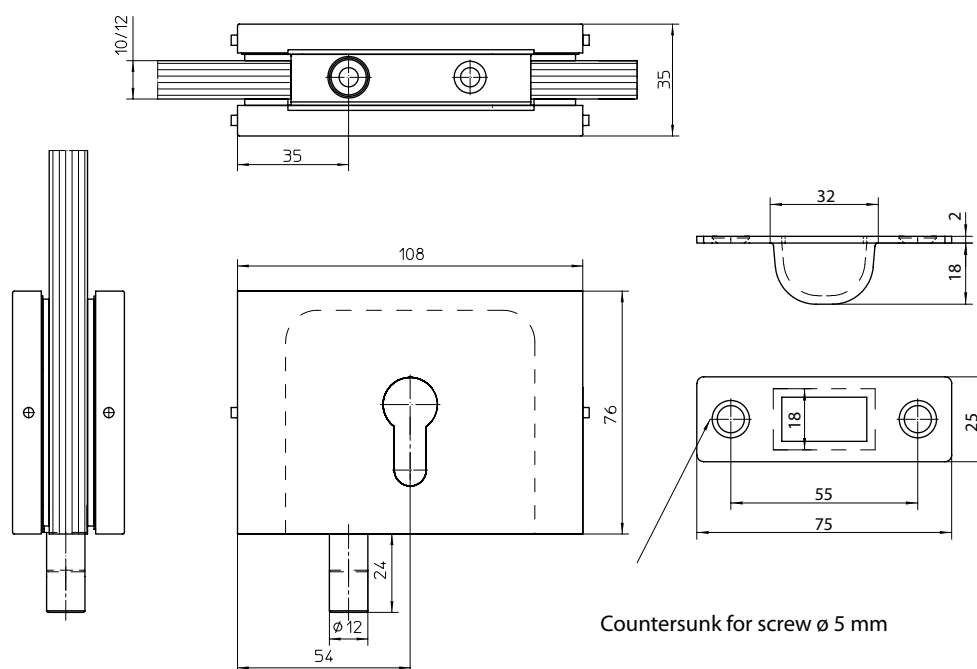

Glass machining, see drawing no. 91905-9-0964

ORDERING INFORMATION

Description	Version	ID no.
Bottom lock with round bolt GEZE PL 55	stainless steel satin	127829
	stainless steel polished	127827
	anodised aluminium	135097
Latch catch LC	stainless steel satin	124156
	stainless steel polished	124157
Additional shim IL 55 for 8 mm glass		135151


Bottom lock, rounded GEZE PL 60

- bottom lock, rounded, without cylinder
- surface made of anodised aluminium, stainless steel satin or polished

GEZE PL 60



Drawing no. 91905-1-0119

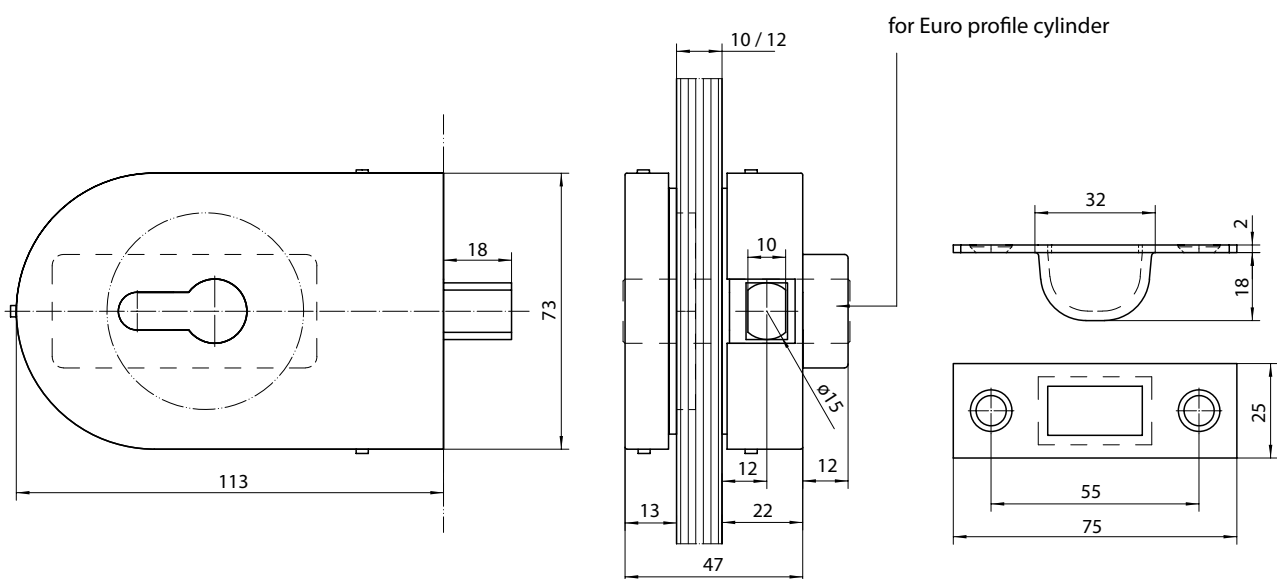

Glass machining, see drawing no. 91905-9-965

ORDERING INFORMATION

Description	Version	ID no.
Bottom lock, rounded GEZE PL 60	stainless steel satin	127830
	stainless steel polished	127851
	anodised aluminium	135098
Latch catch LC	stainless steel satin	124156
	stainless steel polished	124157
Additional shim IL 60 for 8 mm glass		135152

GEZE PATCH FITTINGS


Double fanlight patch with reinforcement GEZE PT 51

- double fanlight patch with two pivot pins (D=15mm) and reinforcement on one side
- surface made of anodised aluminium, stainless steel satin or polished

GEZE PT 51



Drawing no. 91905-1-0108

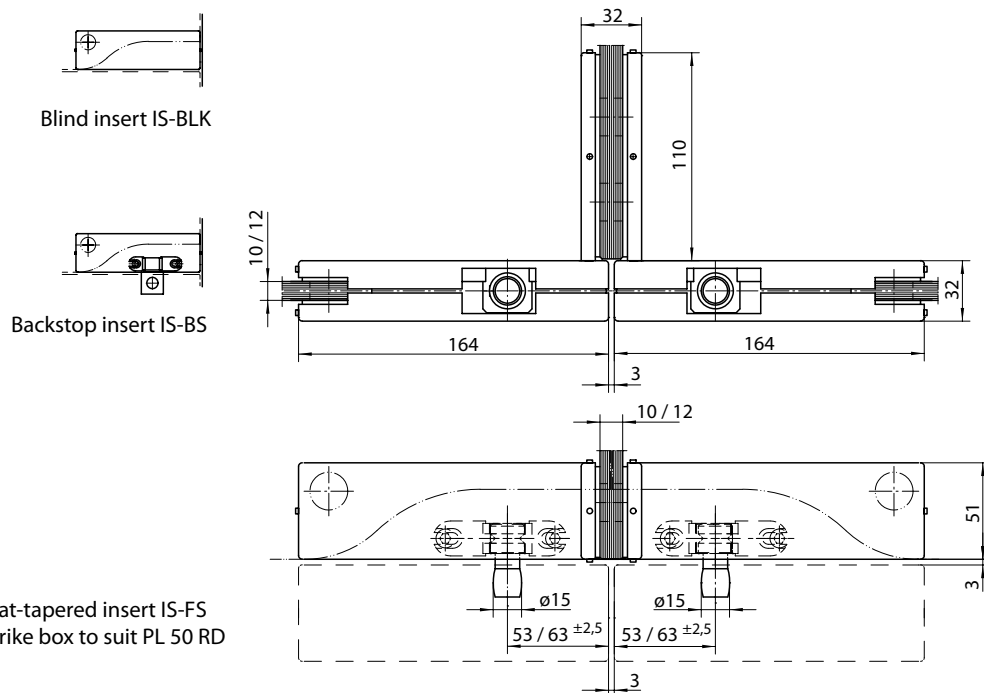

Glass machining, see drawing no. 91905-9-0953

ORDERING INFORMATION

Description	Version	ID no.
Double fanlight patch with reinforcement GEZE PT 51	stainless steel satin	127279
	stainless steel polished	127280
	anodised aluminium	135086
Blind insert IS-BLK	stainless steel satin	135349
	stainless steel polished	135106
	anodised aluminium	135350
Backstop insert IS-BS	steel	135105
Additional shim IL 51 for 8 mm glass		135080


Double strike box GEZE GK 20

- double strike box
- surface made of anodised aluminium, stainless steel satin or polished

GEZE GK 20



Drawing no. 91905-1-0120

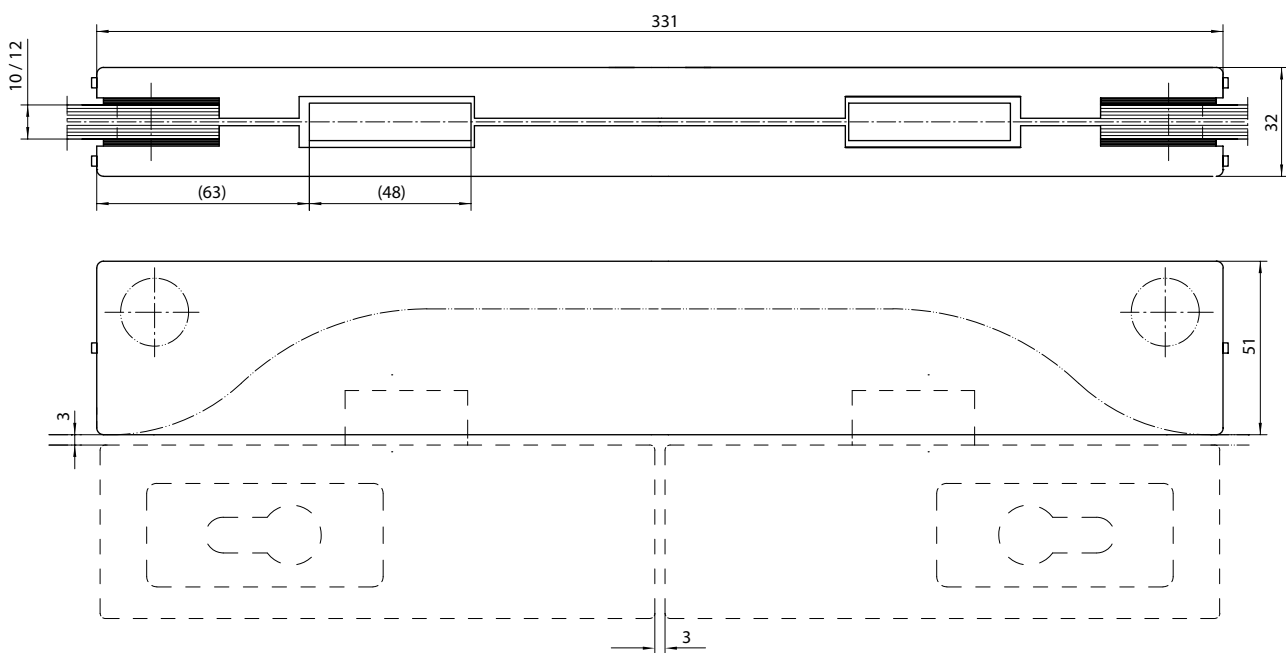

Glass machining, see drawing no. 91905-9-0957

ORDERING INFORMATION

Description	Version	ID no.
Double strike box GEZE GK 20	stainless steel satin	111467
	stainless steel polished	119886
	anodised aluminium	135099
Additional shim IL 75/20 for 8 mm glass		135144


Strike box GEZE GK 50

- strike box
- surface made of anodised aluminium, stainless steel satin or polished

GEZE GK 50



Drawing no. 91905-1-0121

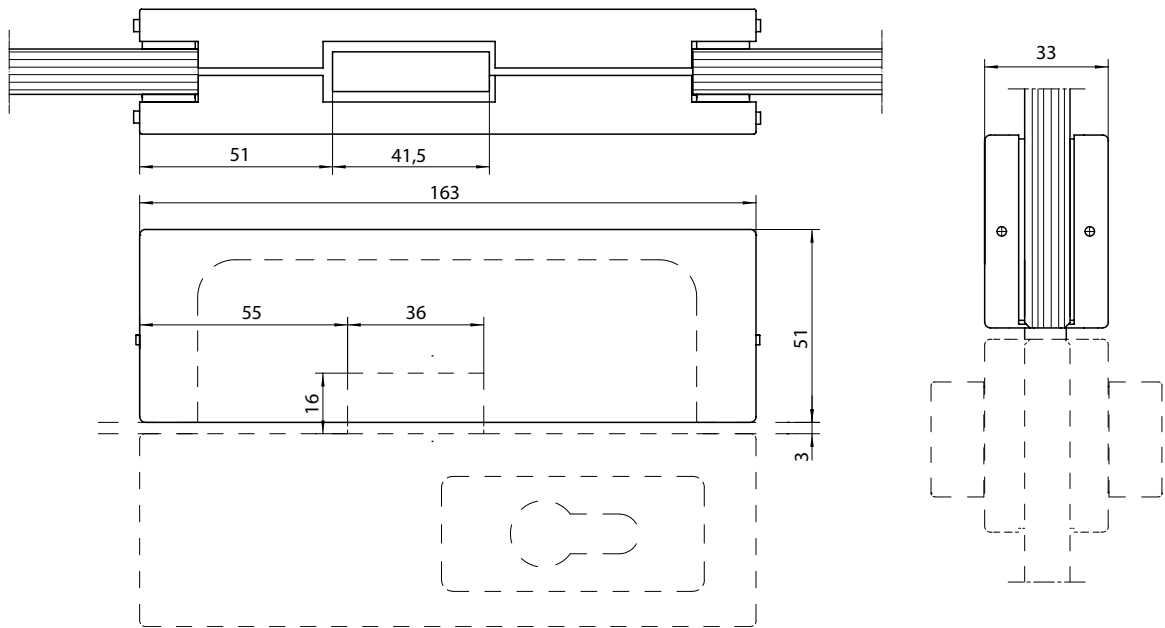

Glass machining, see drawing no. 91905-9-0962

ORDERING INFORMATION

Description	Version	ID no.
Strike box GEZE GK 50	stainless steel satin	111463
	stainless steel polished	119883
	anodised aluminium	135100
Additional shim IL 50 for 8 mm glass		135149


Connector patch with stop plate GEZE PT 62

- connector patch with stop plate
- surface made of anodised aluminium, stainless steel satin or polished

GEZE PT 62



Drawing no. 91905-1-0109

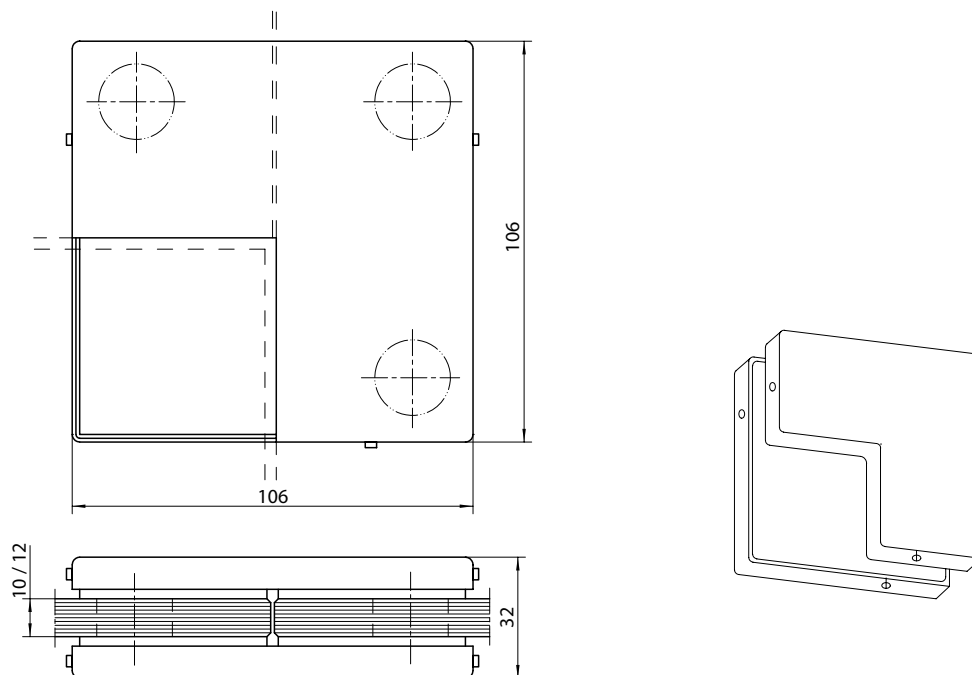

Glass machining, see drawing no. 91905-9-0954

ORDERING INFORMATION

Description	Version	ID no.
Connector patch with stop plate GEZE PT 62	stainless steel satin	127229
	stainless steel polished	127276
	anodised aluminium	135087
Additional shim IL 62 for 8 mm glass		135141

GEZE PATCH FITTINGS


Connector patch GEZE PT 63

- connection fixed panel/fanlight
- surface made of anodised aluminium, stainless steel satin or polished

GEZE PT 63



Drawing no. 91905-1-0110

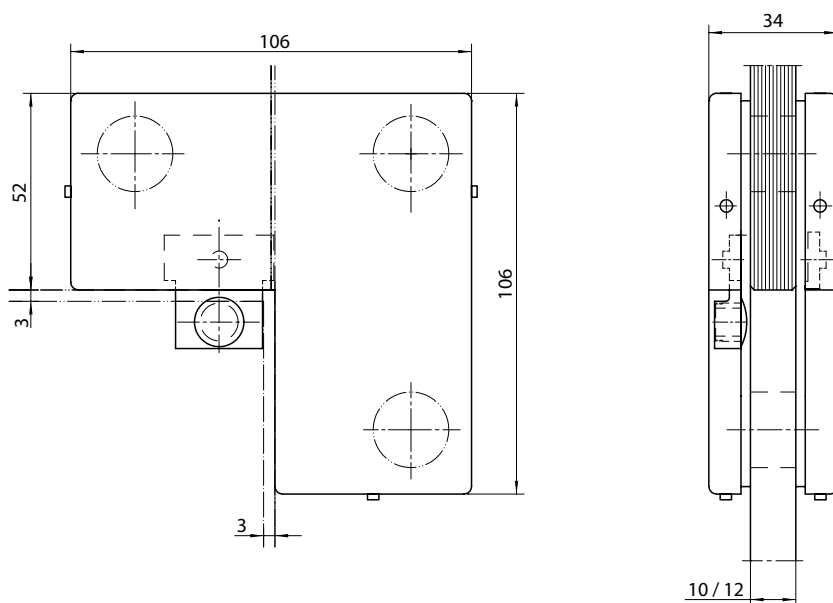

Glass machining, see drawing no. 91905-9-0954

ORDERING INFORMATION

Description	Version	ID no.
Connector patch GEZE PT 63	stainless steel satin	111469
	stainless steel polished	119887
	anodised aluminium	135088
Additional shim IL 63 for 8 mm glass		135142


Connector patch GEZE PT 70

- connection (fanlight/twofold)
- surface made of anodised aluminium, stainless steel satin or polished

GEZE PT 70



Drawing no. 91905-1-0111

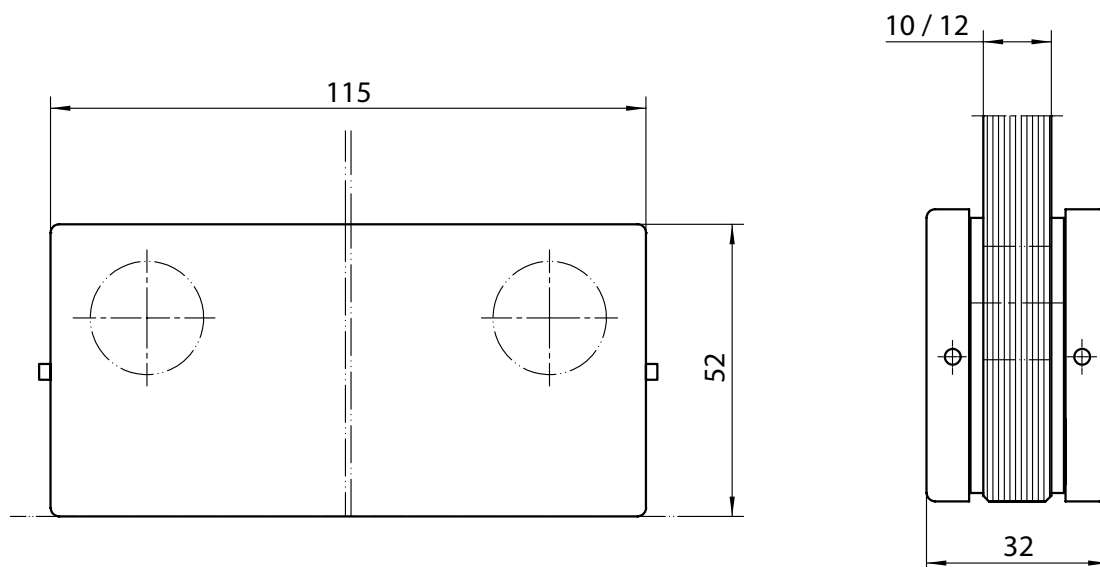

Glass machining, see drawing no. 91905-9-0956

ORDERING INFORMATION

Description	Version	ID no.
Connector patch GEZE PT 70	stainless steel satin	111471
	stainless steel polished	119889
	anodised aluminium	135089
Additional shim IL 70 for 8 mm glass		135143

GEZE PATCH FITTINGS


Double fanlight patch GEZE PT 75

- double fanlight patch with two pivot pins (D=15mm), without reinforcement
- surface made of anodised aluminium, stainless steel satin or polished


GEZE PT 75




Drawing no. 91905-1-0112



Blind insert IS-BLK



Backstop insert IS-BS

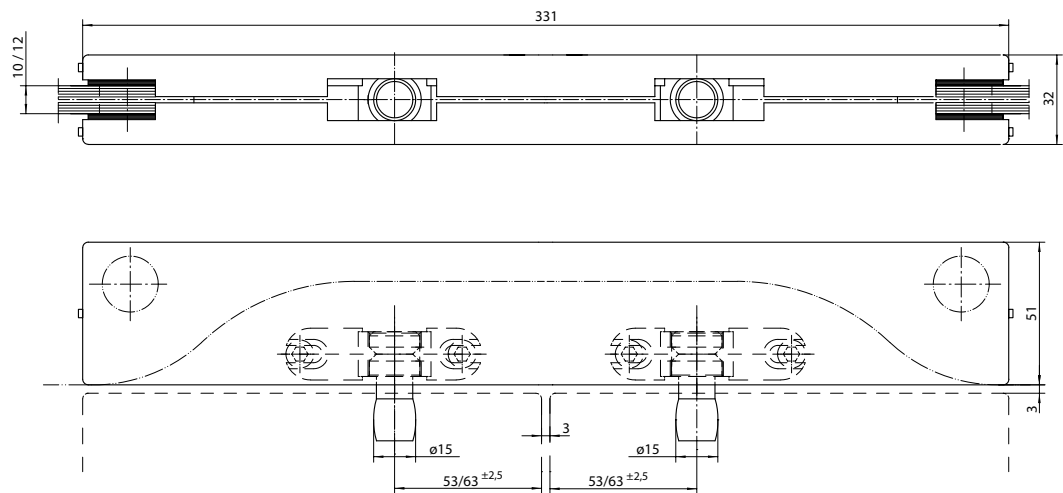

Glass machining, see drawing no. 91905-9-0957

ORDERING INFORMATION

Description	Version	ID no.
Double fanlight patch GEZE PT 75	stainless steel satin	127277
	stainless steel polished	127278
	anodised aluminium	135090
Blind insert IS-BLK	stainless steel satin	135349
	stainless steel polished	135106
	anodised aluminium	135350
Backstop insert IS-BS	steel	135105
Additional shim IL 75/20 for 8 mm glass		135144


Connector patch GEZE PT 80

- connection (fourfold)
- surface made of anodised aluminium, stainless steel satin or polished

GEZE PT 80



Drawing no. 91905-1-0113

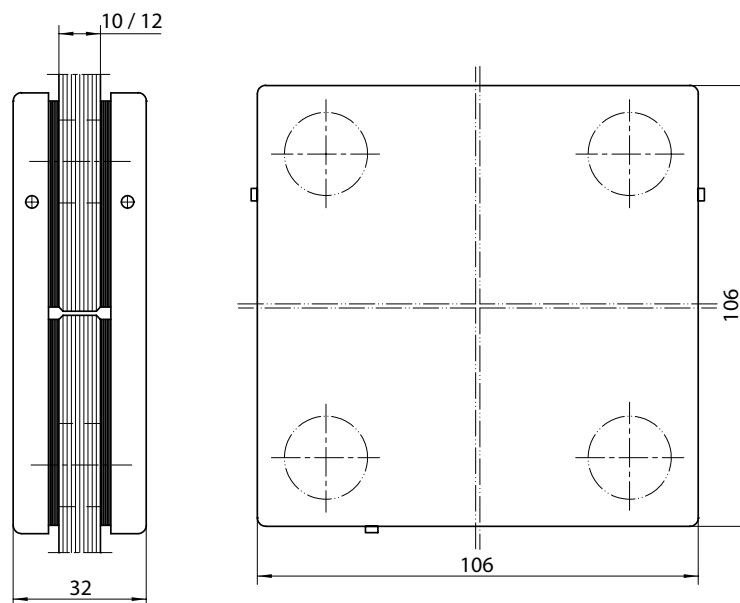

Glass machining, see drawing no. 91905-9-0958

ORDERING INFORMATION

Description	Version	ID no.
Connector patch GEZE PT 80	stainless steel satin	111473
	stainless steel polished	119891
	anodised aluminium	135091
Additional shim IL 80 for 8 mm glass		135145


Connector patch with reinforcement GEZE PT 81

- connector patch with centre reinforcement
- surface made of anodised aluminium, stainless steel satin or polished

GEZE PT 81



Drawing no. 91905-1-0114

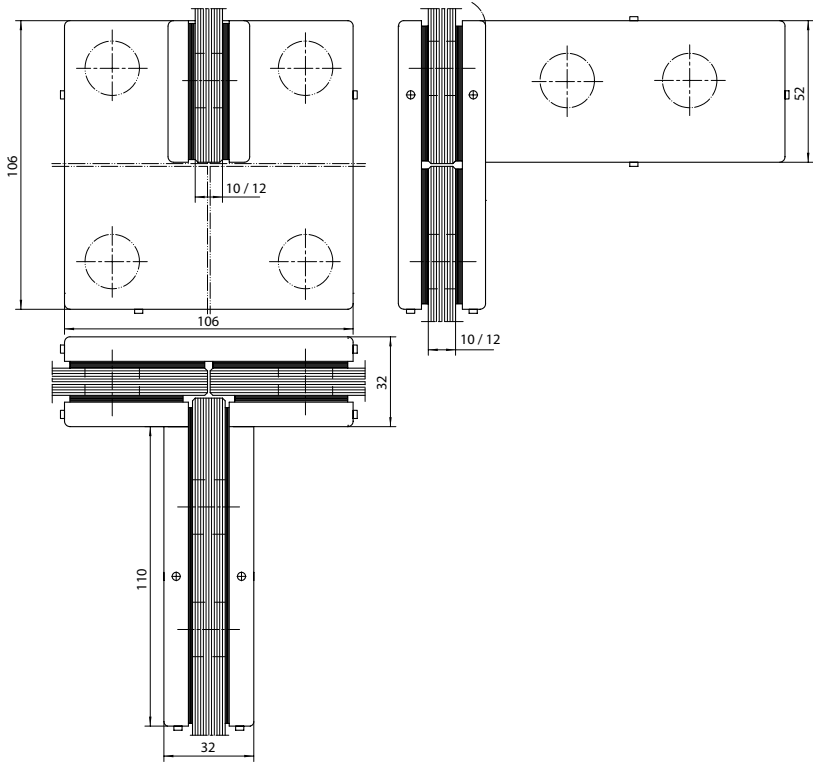

Glass machining, see drawing no. 91905-9-0959

ORDERING INFORMATION

Description	Version	ID no.
Connector patch with reinforcement GEZE PT 81	stainless steel satin	127230
	stainless steel polished	127275
	anodised aluminium	135092
Additional shim IL 81 for 8 mm glass		135146


Connector patch for wall mounting GEZE PT 84

- glass/wall connection (twofold)
- surface made of anodised aluminium, stainless steel satin or polished

GEZE PT 84



Drawing no. 91905-1-0115

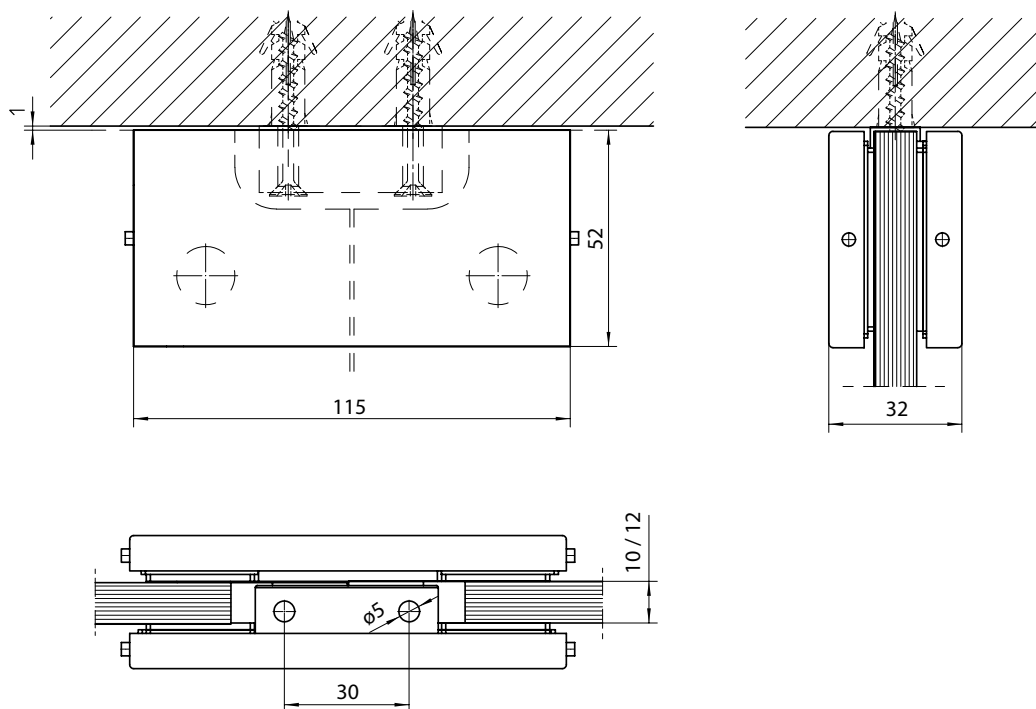

Glass machining, see drawing no. 91905-9-0960

ORDERING INFORMATION

Description	Version	ID no.
Connector patch for wall mounting GEZE PT 84	stainless steel satin	124164
	stainless steel polished	124165
	anodised aluminium	135093
Additional shim IL 84 for 8 mm glass		135147


Connector patch for wall mounting GEZE PT 90

- glass/wall connection (simplex)
- surface made of anodised aluminium, stainless steel satin or polished

GEZE PT 90



Drawing no. 91905-1-0116

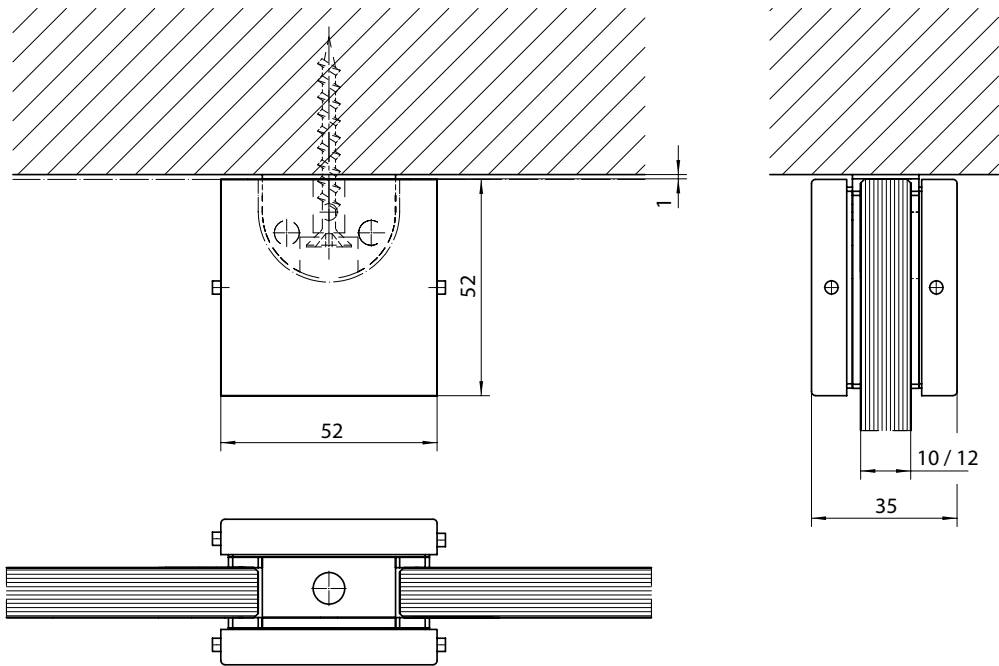

Glass machining, see drawing no. 91905-9-0961

ORDERING INFORMATION

Description	Version	ID no.
Connector patch for wall mounting GEZE PT 90	stainless steel satin	124162
	stainless steel polished	124163
	anodised aluminium	135094
Additional shim IL 90 for 8 mm glass		135148


Fixed panel profile GEZE FP

- fixed panel patch with cover profiles in anodised aluminium - length 6 m - for 10 mm glass
- additional self-seal cover profiles and cover caps of stainless steel, satin or polished

GEZE FP-P



Drawing no. 91905-1-0125

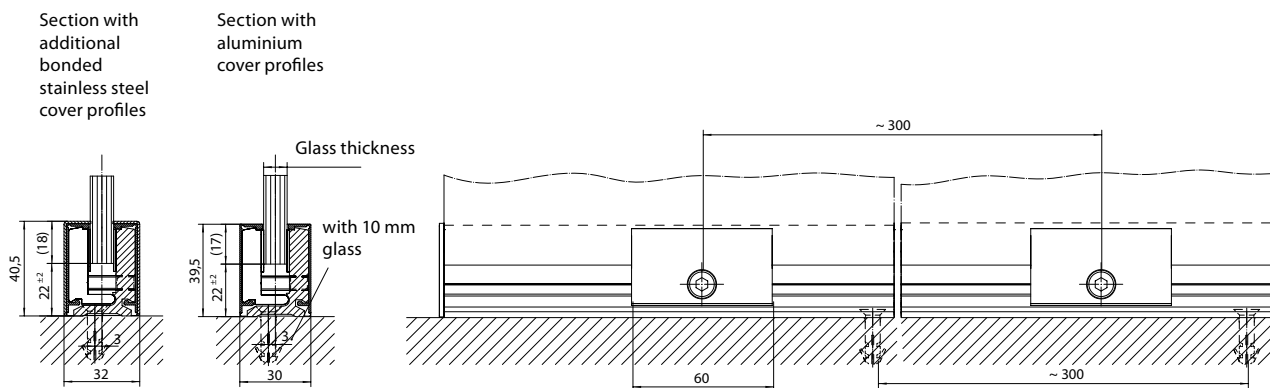

Description	Version	ID no.
Fixed panel profile GEZE FP	anodised aluminium brushed E2/EV1	138075
	anodised similarly to stainless steel	138076
Cover profile FP-C L = 3000 mm	stainless steel satin	127220
	stainless steel polished	127219
	stainless steel satin	127232
Cover cap FP-EC for 10 mm glass	stainless steel polished	127231
	anodised aluminium EV1	135978
Accessory for 12 mm glass FP-12 (for 6 m profile)		138109

GEZE PATCH FITTINGS

GEZE products in combination with patch fittings

PENDULO C

Transparency and functionality

GEZE Pendulo C is a door rail with an integrated door closer. It protects the endangered lower glass edge of swing doors against damage and leads the moving leaf comfortably back into this position.

The profiles enable door leaf widths up to 1100 mm. Via the refined path of the door closer in the door rail, the partly disturbing floor mounted fixtures become redundant. The door can be pre-mounted comfortably in the workshop.

Only for the ground brackets and the upper pivot pins do simply drillings need to be undertaken at the building. Brackets and pivots can be easily and uncomplicatedly fitted. Afterwards the door can be simply hung and the closer is adjusted.



FLOOR SPRINGS

Diversity and reliability

The GEZE floor springs reliably and unobtrusively move single-action and double-action doors of any material.

The product range comprises systems for low as well as heavy leaf weights and door closers for the use with smoke and fire-proof doors. The floor springs for double-leaf doors contain an integrated closing sequence control or additionally an electromechanical hold-open device. The floor springs with lever and guide rail are used for doors with hinges.

By using the GEZE floor springs in combination with GEZE patch fittings it is also possible to build first-class double action glass doors in an easy and economical way, suitable for both commercial and private use.



The GEZE TS 500 NV and TS 500 N EN3 floor springs – small but perfectly formed

The exceptionally low overall height of only 42 mm is just one of the unmatched benefits of the TS 500 NV and TS 500 N EN3 floor springs for single action and double action doors. They are unobtrusive but the perfect choice for both new and retrofitted buildings. Their invisible method of functioning – even in all-glass doors – is also a great asset to small and medium-sized doors of up to 1100 mm and leaf weights of up to 150 kg. Used in conjunction with GEZE glass clamping fittings, they enable elegant and attractive all-glass double action doors to be installed in not only highly frequented buildings (such as office complexes), but also private residences. The longevity of the high-quality individual components has been proven in practice, with 500.000 closing and opening cycles performed without any signs of wear.

GEZE TS 500 NV / N EN3



low height of only 42 mm (plus 3 mm in use with PT10)



up to 150 kg leaf weight (100 kg with TS 500 N EN3)



closing force adjustable size 1-4 according to EN 1154 (TS 500 N EN3 with fixed size 3)



back check fixed



closing force adjustable



latching action adjustable (for TS 500 NV only)



optional hold-open device 85°, 90°, 105°, 120°



closing action from 175°

ORDERING INFORMATION

Description	Version	ID no.
GEZE TS 500 NV	without hold-open	102084
GEZE TS 500 N EN3	without hold-open	103086
	stainless steel satin	102127
Cover plates with screw accessories	dark bronze	103011
	satin brass	103012

GEZE PATCH FITTINGS

The floor spring GEZE TS 550 NV – convenient and secure

The TS 550 NV offers comfort and elegance for double action and single action doors with leaf weights up to 300 kg. The invisible functionality is an incontestable advantage just for all-glass doors. Particularly when used with high frequented doors in foyers (f. ex. office buildings and hall entrances) its versatility and robustness become even more apparent.

GEZE TS 550 NV



slim installation height of only 54 mm (plus 3 mm in use with PT10)



interchangeable axle upper part for **door leaf weights up to 300 kg**



infinitely adjustable closing force EN3 to EN6



integrated back check to prevent hard shocks



individual **adjustable closing force**



adjustable latching action for secure closing



infinitely variable hydraulic hold-open between 80° and 165°
und **integrated delayed closing action** against too rapid closing

ORDERING INFORMATION

Description	Version	ID no.
GEZE TS 550 NV		123950
Cover plates, reinforced to 1,5 mm material thickness	stainless steel satin	125888
	dark bronze	125890
	satin brass	125889

GEZE References



Media-TIC, Barcelona, Spain



Media-TIC, Barcelona, Spain



Glas Trösch, Kempten, Germany

POTENTIAL APPLICATIONS OF GEZE PRODUCTS

You will find more product information in the relevant brochures, see ID numbers.

Door technology

01	Overhead door closers ID 091593, ID 091594
02	Hold-open systems ID 091593, ID 091594
03	Integrated door closers ID 091609
04	Floor springs ID 091607
05	Sliding door gear systems and linear guides ID 123605, ID 008770, ID 000586

Automatic door systems

06	Swing doors ID 144785
07	Sliding, telescopic and folding doors ID 143639
08	Circular and semi-circular sliding doors ID 135772
09	Revolving doors ID 132050
10	Actuation devices and sensors ID 142655

Smoke and heat extraction and window technology

11	Fanlight opening systems ID 127787
12	Electric opening and locking systems ID 127785, ID 127789
13	Electrical spindle and linear drives ID 127785, ID 127789
14	Electric chain drives ID 127785, ID 127789
15	Smoke and heat extraction systems ID 127785, ID 139075

Safety technology

16	Emergency exit systems ID 132408
17	Access control systems ID 132158
18	Panic locks ID 132848
19	Electric strikes ID 148666
20	Building management system ID 132408

Glass systems

21	Manual sliding wall systems (MSW) ID 104377
22	Integrated all-glass systems (IGG) ID 104366
23	GEZE Patch fittings mono glass systems ID 122521



POTENTIAL APPLICATIONS OF GEZE PRODUCTS



Door technology

The functionality, superior performance and reliability of GEZE door closers are impressive. A common design across the range, the ability to use them on all common door leaf widths and weights, and the fact that they can be individually adjusted makes their selection simple. They are continually being improved and enhanced with up-to-date features. For example, the requirements of fire protection and accessibility are fulfilled with a door closer system.

Automatic door systems

GEZE automatic door systems open up a huge variety of options in door design. The latest, innovative high-performance drive technology, safety, ease of accessibility and first class universal drive design set them apart. GEZE offers complete solutions for individual requirements. A dedicated division is responsible for the development and construction of individual special designs.

Smoke and heat extraction and window technology

GEZE smoke and heat extraction systems and ventilation technology provide complete systems solutions combining the many requirements of different types of windows. We supply a full range from energy efficient drive systems to natural ventilation and complete solutions for supplying and extracting air, also as certified SHEVs.

Safety technology

GEZE safety technology sets the standards where preventative fire protection, access control and anti-theft security in emergency exits are concerned. For each of these objectives GEZE offers tailored solutions, which combine the individual safety requirements in one intelligent system and close doors and windows in case of danger in a coordinated manner.

Building systems

In GEZE's Building Management System GEZE door, window and safety products can be integrated in to the security and control systems of the building. A central control and visualisation system monitors various automation components in the building and offers security through many different networking capabilities.

Glass systems

GEZE glass systems stand for open and transparent interior design. They can either blend discreetly into the architecture of the building or stand out as an accentuated feature. GEZE offers a wide variety of technologies for functional, reliable and aesthetic sliding wall or sliding door systems providing security with lots of design scope.

GEZE GmbH
P.O. Box 1363
71226 Leonberg
Germany

GEZE GmbH
Reinhold-Vöster-Straße 21-29
71229 Leonberg
Germany
Telefon +49 (0) 7152-203-0
Telefax +49 (0) 7152-203-310

www.geze.com

Germany
 GEZE Sonderkonstruktionen GmbH
 Planken 1
 97944 Boxberg-Schweigern
 Tel. +49 (0) 7930-92 94-0
 Fax +49 (0) 7930-92 94-10
 E-Mail: sk.de@geze.com

GEZE GmbH
 Niederlassung Nord/Ost
 Bühringstraße 8
 13086 Berlin (Weissensee)
 Tel. +49 (0) 30-47 89 90-0
 Fax +49 (0) 30-47 89 90-17
 E-Mail: berlin.de@geze.com

GEZE GmbH
 Niederlassung West
 Nordsternstraße 65
 45329 Essen
 Tel. +49 (0) 201-83 082-0
 Fax +49 (0) 201-83 082-20
 E-Mail: essen.de@geze.com

GEZE GmbH
 Niederlassung Mitte
 Adenauerallee 2
 61440 Oberursel (b. Frankfurt)
 Tel. +49 (0) 6171-63 610-0
 Fax +49 (0) 6171-63 610-1
 E-Mail: frankfurt.de@geze.com

GEZE GmbH
 Niederlassung Süd
 Breitwiesenstraße 8
 71229 Leonberg
 Tel. +49 (0) 7152-203-594
 Fax +49 (0) 7152-203-438
 E-Mail: leonberg.de@geze.com

GEZE Service GmbH NL Südwest
 Reinhold-Vöster-Straße 25
 71229 Leonberg
 Tel. +49 (0) 7152-92 33 34

GEZE Service GmbH NL Nord-Ost
 Bühringstraße 8
 13086 Berlin (Weissensee)
 Tel. +49 (0) 30-47 02 17 32

GEZE Service GmbH NL West
 Nordsternstraße 65
 45329 Essen
 Tel. +49 (0) 201-8 30 82 16

GEZE Service GmbH NL Mitte
 Feldbergstraße 59
 61440 Oberursel
 Tel. +49 (0) 6171-63 327-0

GEZE Service GmbH NL Süd
 Parking 17
 85748 Garching bei München
 Tel. +49 (0) 89-120 07 42-0

Austria
 GEZE Austria
 Wiener Bundesstrasse 85
 A-5300 Hallwang
 Tel: +43/6225/87180
 Fax: +43/6225/87180-299
 E-Mail: austria.at@geze.com

Baltic States
 GEZE GmbH Baltic States office
 Dzelzavas iela 120 S
 1021 Riga
 Tel. +371 (0) 67 89 60 35
 Fax +371 (0) 67 89 60 36
 E-Mail: office-latvia@geze.com

GEZE Benelux B.V.
 Steenoven 36
 5626 DK Eindhoven
 Tel. +31 (0) 40-26 290-80
 Fax +31 (0) 40-26 290-85
 E-Mail: benelux.nl@geze.com

Bulgaria
 GEZE Bulgaria - Trade
 Representative Office
 61 Pirinski Prohod, entrance „B“,
 4th floor, office 5,
 1680 Sofia
 Tel. +359 (0) 24 70 43 73
 Fax +359 (0) 24 70 62 62
 E-Mail: office-bulgaria@geze.com

China
 GEZE Industries (Tianjin) Co., Ltd.
 Shuangchenzhong Road
 Beichen Economic Development
 Area (BEDA)
 Tianjin 300400, P.R. China
 Tel. +86 (0) 22-26 97 39 95-0
 Fax +86 (0) 22-26 97 27 02
 E-Mail: Sales-info@geze.com.cn

GEZE Industries (Tianjin) Co., Ltd.
 Branch Office Shanghai
 Unit 25N, Cross Region Plaza
 No 899, Ling Ling Road,
 XuHui District
 200030 Shanghai, P.R. China
 Tel. +86 (0) 21-523 40 960
 Fax +86 (0) 21-644 72 007
 E-Mail: chinasales@geze.com.cn

GEZE Industries (Tianjin) Co., Ltd.
 Branch Office Guangzhou
 Room 17C3
 Everbright Bank Building, No.689
 Tian He Bei Road
 510630 Guangzhou
 P.R. China
 Tel. +86 (0) 20-38 73 18 42
 Fax +86 (0) 20-38 73 18 34
 E-Mail: chinasales@geze.com.cn

GEZE Industries (Tianjin) Co., Ltd
 Branch Office Beijing
 Room 1001, Tower D
 Sanlitun SOHO
 No. 8, Gongti North Road,
 Chaoyang District
 100027 Beijing, P.R.China
 Tel. +86 (0) 10-59 35 93 00
 Fax +86 (0)10-59 35 93 22
 E-Mail: chinasales@geze.com.cn

France
 GEZE France S.A.R.L.
 ZAC de l'Orme Rond
 RN 19
 77170 Servon
 Tel. +33 (0) 1 60 62 60 70
 Fax +33 (0) 1 60 62 60 71
 E-Mail: france.fr@geze.com

Hungary
 GEZE Hungary Kft.
 Bartók Béla út 105-113.
 Budapest
 H-1115
 Tel. +36 (1) 481 4670
 Fax +36 (1) 481 4671
 E-Mail: office-hungary@geze.com

Iberia
 GEZE Iberia S.R.L.
 Pol. Ind. El Pla
 C/Comerc, 2-22, Nave 12
 08980 Sant Feliu de Llobregat
 (Barcelona)
 Tel. +34 9-02 19 40 36
 Fax +34 9-02 19 40 35
 E-Mail: info@geze.es

India
 GEZE India Private Ltd.
 MF 2 & 3, Guindy Industrial Estate
 Ekkattuthangal
 Chennai 600 097
 Tamilnadu
 Tel. +91 (0) 44 30 61 69 00
 Fax +91 (0) 44 30 61 69 01
 E-Mail: office-india@geze.com

Italy
 GEZE Italia Srl
 Via Giotto, 4
 20040 Cambiago (MI)
 Tel. +39 (0) 29 50 695-11
 Fax +39 (0) 29 50 695-33
 E-Mail: italia.it@geze.com

GEZE Engineering Roma Srl
 Via Lucrezia Romana, 91
 00178 Roma
 Tel. +39 (0) 6-72 65 311
 Fax +39 (0) 6-72 65 3136
 E-Mail: roma@geze.biz

Poland
 GEZE Polska Sp.z o.o.
 ul. Annapol 21
 03-236 Warszawa
 Tel. +48 (0) 22 440 4 440
 Fax +48 (0) 22 440 4 400
 E-Mail: geze.pl@geze.com

Romania
 GEZE Romania s.r.l.
 IRIDE Business Park,
 Str. Dimitrie Pompeiu nr. 9-9a,
 Building 10, Level 2, Sector 2,
 020335 Bucharest
 Tel.: +40 (0) 21 25 07 750
 Fax: +40 (0) 21 25 07 750
 E-Mail: office-romania@geze.com

Russian Federation
 GEZE GmbH Representative
 Office Russia
 Gamsonovskiy Per. 2
 115191 Moskau
 Tel. +7 (0) 495 933 06 59
 Fax +7 (0) 495 933 06 74
 E-Mail: office-russia@geze.com

Scandinavia – Sweden
 GEZE Scandinavia AB
 Mallslingan 10
 Box 7060
 18711 Täby, Sweden
 Tel. +46 (0) 8-7323-400
 Fax +46 (0) 8-7323-499
 E-Mail: sverige.se@geze.com

Scandinavia – Norway
 GEZE Scandinavia AB avd. Norge
 Industriveien 34 B
 2073 Dal
 Tel. +47 (0) 639-57 200
 Fax +47 (0) 639-57 173
 E-Mail: norge.se@geze.com

Scandinavia – Finland
 Branch office of GEZE Scandinavia AB
 Herralantie 824
 Postbox 20
 15871 Hollola
 Tel. +358 (0) 10-40 05 100
 Fax +358 (0) 10-40 05 120
 E-Mail: finland.se@geze.com

Scandinavia – Denmark
 GEZE Danmark
 Branch office of GEZE Scandinavia AB
 Mårkærvej 13 J-K
 2630 Taastrup
 Tel. +45 (0) 46-32 33 24
 Fax +45 (0) 46-32 33 26
 E-Mail: danmark.se@geze.com

Singapore
 GEZE (Asia Pacific) Pte. Ltd.
 21 Bukit Batok Crescent
 #23-75 Wcega Tower
 Singapore 658065
 Tel: +65 6846 1338
 Fax: +65 6846 9353
 E-Mail: gezesese@geze.com.sg

South Africa
 GEZE Distributors (Pty) Ltd.
 118 Richards Drive, Halfway House,
 Ext 111, P.O. Box 7934, Midrand 1685,
 South Africa
 Tel: + 27 (0) 113 158 286
 Fax: + 27 (0) 113158261
 Email: info@gezesa.co.za

Switzerland
 GEZE Schweiz AG
 Bodenackerstrasse 79
 4657 Dulliken
 Tel. +41 (0) 62 285 54 00
 Fax +41 (0) 62 285 54 01
 E-Mail: schweiz.ch@geze.com

Turkey
 GEZE GmbH Türkiye - İstanbul
 İrtibat Bürosu
 Ataşehir Bulvarı, Ata 2/3
 Plaza Kat: 9 D: 84 Ataşehir
 Kadıköy / İstanbul
 Tel. + 90 (0) 21 64 55 43 15
 Fax + 90 (0) 21 64 55 82 15
 E-Mail: office-turkey@geze.com

Ukraine
 GEZE Ukraine TOV
 ul. Viskoznaya, 17,
 Building 93-B, Office 12
 02660 Kiev
 Tel./Fax +38 (0) 44 501 22 25
 E-Mail: office-ukraine@geze.com

United Arab Emirates/GCC
 GEZE Middle East
 P.O. Box 17903
 Jebel Ali Free Zone
 Dubai
 Tel. +971 (0) 4-88 33 112
 Fax +971 (0) 4-88 33 240
 E-Mail: geze@emirates.net.ae

United Kingdom
 GEZE UK Ltd.
 Blenheim Way
 Fradley Park
 Lichfield
 Staffordshire WS13 8SY
 Tel. +44 (0) 1543 44 30 00
 Fax +44 (0) 1543 44 30 01
 E-Mail: info.uk@geze.com

GEZE REPRESENTATIVE